

Premier Net

800-2000VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Pseudo Sinewave output
- Battery test feature
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 ports
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com


Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PN 800	PN 1000	PN 1500	PN 2000
Rated Power (VA)	800	1000	1500	2000
Power (W)	480	600	900	1200
INPUT				
Nominal voltage	220 - 230 - 240 Vac Single Phase			
Input voltage tolerance	230Vac (±25%)			
Frequency	50 or 60 Hz Auto sensing			
OUTPUT				
Nominal Output Voltage	230Vac Single Phase			
Voltage on Mains Operation	-8% to +10%			
Voltage on Battery Operation	230 Vac (±5%)			
Transfer Time	2 ms			
Frequency	50 or 60 Hz (±0.5%)			
Waveform	Pseudo-sinewave			
BATTERIES				
Type	Sealed lead-acid			
OTHER FEATURES				
Weight (kg)	14	15	15	20
Dimensions (HxWxD)	180 x 140 x 375mm			215x140x410mm
Output Socket	4 x IEC 320 10A			
Regulations	EN62040-1-1 and Directive EN62040-3, EN62040-2 and Directive EC 2004/108 EC			
Ambient temperature	0°C / +40°C			
Colour	Dark Grey			
Relative humidity	95% non-condensing			

Specifications are subject to change without any prior notice

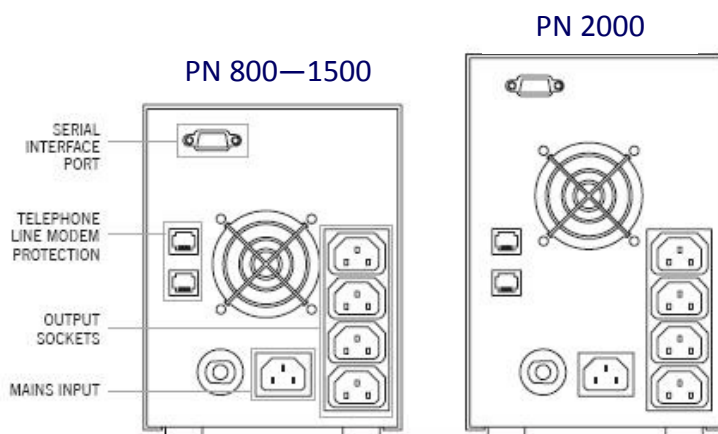

Issue 10/12



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com

Your satisfaction is our motivation
www.cetronicpower.com