

Premier Vision Rack

500-1100VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Sinewave output
- Automatic battery test
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- SNMP network card option
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com

Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PVR 500	PVR 800	PVR 1100
Rated power (VA)	500	800	1100
Power (W)	350	540	740

INPUT

Nominal voltage	230 Vac (200, 208, 220, 240 V selectable)
Voltage tolerance	160 – 294 Vac
Frequency	50 – 60Hz with automatic selection
Frequency tolerance	± 5%

BATTERIES

Type	Sealed lead acid
Charging time	4-6 hours

OUTPUT


Nominal volatage	230 Vac (200, 208, 220, 240 V selectable)
Frequency	50 – 60 Hz with automatic selection
Waveform	Sinusoidal

ADDITIONAL INFO

Weight	12	14	16
Dimensions (hwd) (mm)	1U x 19" x 460		
Communication	USB / RS232 / slot for communication interface		
Regulations	EN 62040-1-1 and Directive 2006/95/EC EN 62040-2 and Directive 2004/108 EC		
Ambient temperature	0°C / +40°C		
Colour	Black		
Relative humidity	<95% non-condensing		
Noise level	< 50 dBA		

Specifications subject to change without any prior notice.

PVR 500/800/1100

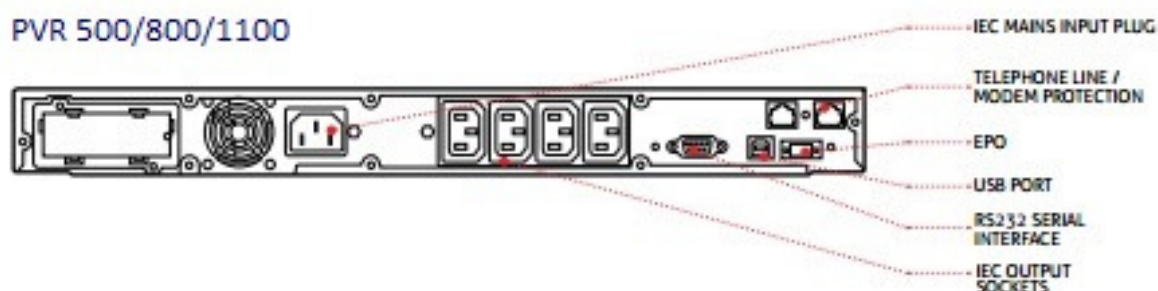

Issue 08/13



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com