

Premier Vision Tower

800-2000VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line Interactive technology with AVR and filters
- Sinewave output
- Automatic battery test
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- SNMP network card option
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com


Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PVT 800	PVT 1100	PVT 1500	PVT 2000
Rated power (VA)	800	1100	1500	2000
Power (W)	640	880	1200	1600
INPUT				
Nominal voltage	220-230-240 Vac selectable			
Voltage tolerance	162 – 290 Vac			
Frequency	50 – 60Hz with automatic selection			
Frequency tolerance	± 5%			
BATTERIES				
Type	Sealed lead acid			
Charging time	4-6 hours			
OUTPUT				
Nominal volatage	220-230-240 Vac selectable			
Frequency	50 – 60 Hz with automatic selection			
Waveform	Sinusoidal			
ADDITIONAL INFO				
Weight	10.5	11.3	16.5	18.5
Dimensions (hwd) (mm)	247 x 120 x 443		247 x 160 x 443	
Communication	USB / RS232 / slot for communication interface			
Regulations	EN 62040-1-1 and Directive 2006/95/EC EN 62040-2 and Directive 2004/108 EC			
Ambient temperature	0°C / +40°C			
Colour	Black			
Relative humidity	<95% non-condensing			
Noise level	< 40 dBA			

Specifications subject to change without any prior notice.

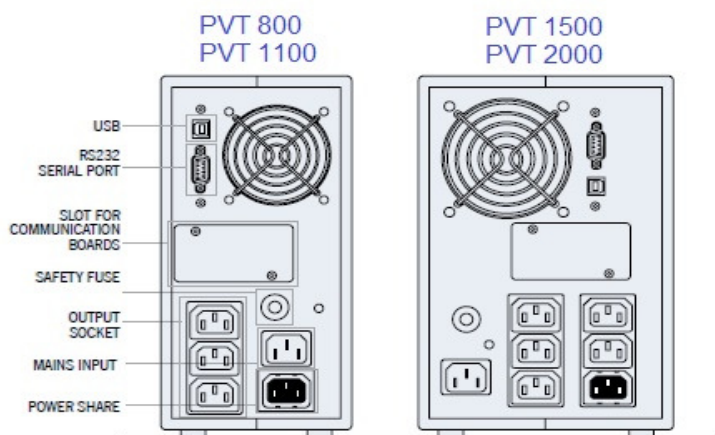

Issue 10/15



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com