

Premier iDialog

400-1600VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Pseudo Sinewave output
- Battery test feature
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com


Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	IDG 400	IDG 600	IDG 800	IDG 1200	IDG 1600
Rated Power (VA)	400	600	800	1200	1600
Power (W)	240	360	480	720	960
INPUT					
Nominal voltage	220 – 240 Vac				
Input voltage tolerance	230 Vac (+20/-25%)				
Frequency	50 or 60 Hz with automatic selection				
OUTPUT					
Voltage during mains	230 Vac (+20/-25%)				
Voltage during batteries	230 Vac (±10%)				
Frequency during batteries	50 or 60 Hz (±1%)				
Waveform	Pseudo-sine				
BATTERIES					
Type	Sealed lead-acid				
Charging time	6-8 hours				
OTHER FEATURES					
Weight (kg)	3.7		4.1	8.1	8.6
Dimensions (hwd) (mm)	192 x 90 x 232			275 x 97 x 315	
Communication	USB			USB + RS232	
Output Socket	4 IEC 320 C13			6 IEC 320 C13	
Regulations	EN 62040-1-1 and Directive EN 62040-2 and Directive 2004/108 EC				
Ambient temperature	0°C / +40°C				
Colour	Black				
Altitude and relative humidity	6000m max altitude, <95% non-condensing				

Specifications are subject to change without any prior notice

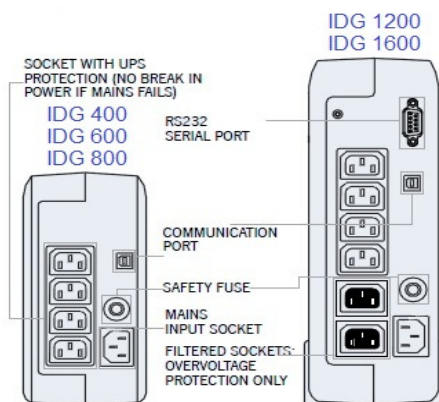

Issue 10/15



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com