

Premier Vision

500-3000VA

Single-phase input

Single-phase output

Uninterruptible Power Supply

Main Features

- Line-Interactive technology with AVR and filters
- Sinewave output
- Automatic battery test
- Cold start
- Auto re-start
- Superb battery management
- 50 or 60Hz operation
- Audible/visual alarms
- RS-232 & USB ports
- SNMP network card option
- Free software



Tel: +44 (0)1920 871077

Fax: +44 (0)1920 871337

Email: sales@cetronicpower.com

Your satisfaction is our motivation

www.cetronicpower.com

SPECIFICATIONS

MODEL	PVR 500	PVR 800	PVR 1100	PVD 1500	PVD 2200	PVD 3000
Rated power (VA)	500	800	1100	1500	2200	3000
Power (W)	350	540	740	1050	1540	2100
INPUT						
Nominal voltage	230 Vac (200, 208, 220, 240 V selectable)					
Voltage tolerance	160 – 294 Vac					
Frequency	50 – 60Hz					
Frequency tolerance	± 5%					
BATTERIES						
Type	Sealed lead acid					
Charging time	4-6 hours					
OUTPUT						
Nominal volatage	230 Vac (200, 208, 220, 240 V selectable)					
Frequency	50 – 60 Hz with automatic selection					
Waveform	Sinusoidal					
ADDITIONAL INFO						
Weight	12	13.5	15.6	28.7	31	32.8
Dimensions (hwd) (mm)	1U x 19" x 460			T 88x438x582 / R 2Ux19"x582		
Communication	USB / RS232 / slot for communication interface					
Regulations	EN 62040-1-1 and Directive 2006/95/EC EN 62040-2 and Directive 2004/108 EC					
Ambient temperature	0°C / +40°C					
Colour	Dark grey RAL 7016					
Relative humidity	<95% non-condensing					
Noise level	< 50 dBA					

Specifications subject to change without any prior notice.

1. Remove the mimic panel by pressing the appropriate button



2. Rotate the mimic panel and insert it into position



3. Rotate the UPS 90°




4. Insert the UPS into the rack



Optional Extras

- SNMP Network Interface Card
- Relay Card (Volt-free contacts)
- External Manual Bypass Switch
- Extended Battery Back-Up Times
- Remote Alarm Panel
- 19" Rack-Mounted Units

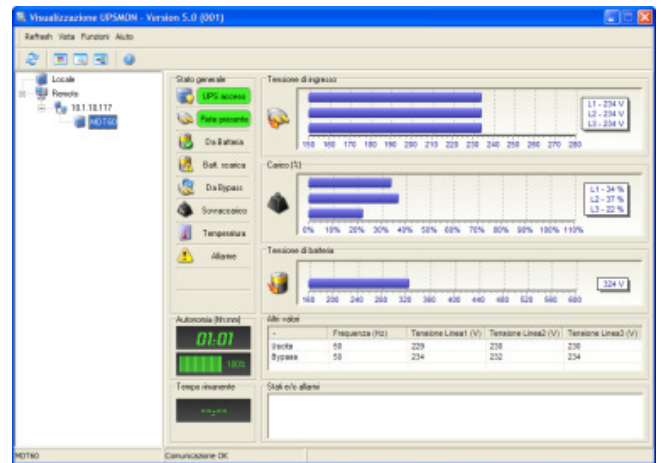

Top right: Software Screenshot

Right: Front Screen


Left: Remote Alarm Panel




PVR 500/800/1100



PVD 1500

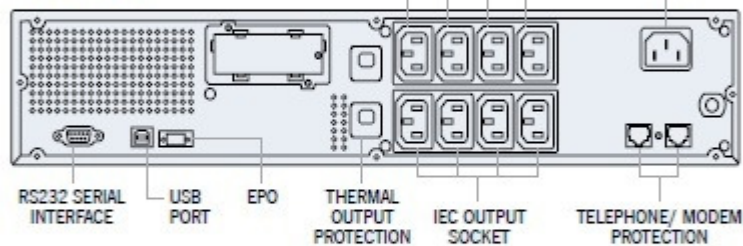

PVD 2200/3000

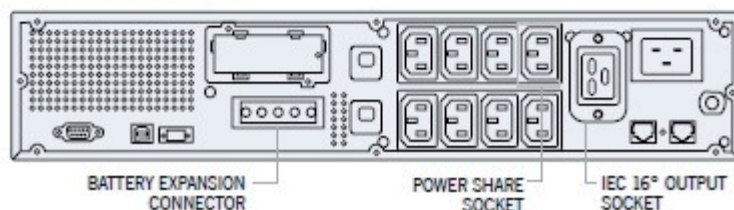

Issue 10/12



Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com

Your satisfaction is our motivation
www.cetronicpower.com