



SOHO



DATACENTRE

# Vision Rack



LINE INTERACTIVE



**1:1** 800-1100 VA



USB plug



Hot swap battery



Plug & Play installation

## HIGHLIGHTS

- Superior protection
- High availability
- Versatility
- LCD display
- Automatic voltage regulation (AVR)

The Vision Rack range is available in models from 800 VA to 1100 VA with sinusoidal digital technology.

The Vision Rack range, with its advanced communications and connectivity options, is the ideal solution for installations requiring superior protection and versatility in the power supply system. Vision Rack is the ideal solution for the protection of peripheral network devices, servers, and network back-up systems.

### Superior protection

The Vision Rack range uses Line Interactive technology and provides a sinusoidal output

voltage. This technology provides efficiency levels of 98% and therefore reduced energy consumption. It also ensures a high level of protection against mains power disturbances.

The automatic voltage regulator (AVR) provides protection from surges, overvoltages and undervoltages, without battery intervention.

Reduced battery usage ensures that the battery set is 100% available for mains power supply failures and is able to provide greater autonomy.

EMI filters then provide further protection from voltage surges and transients.

When the mains power supply fails, the load is powered by the inverter and receives a perfectly sinusoidal supply for maximum power continuity and reliability.

### High availability

An EnergyShare socket allows load-shedding and the shutdown of less sensitive peripheral devices to extend battery runtime for critical loads.

"Hot Swap" batteries can be removed via the front panel for easy and safe UPS maintenance.

Battery test facility to detect deteriorating battery performance.

Deep discharge protection to reduce battery ageing.

### Versatility

Cold Start function to allow the UPS to power up with no mains power supply present.

### Display

Vision models have a backlit LCD display providing UPS status information, load and battery performance.

### Advanced communications

- Advanced multi-platform communications for all operating systems and network environments: PowerShield<sup>3</sup> monitoring and shutdown software for Windows operating systems 8, 7, Hyper-V, 2012, 2008, and previous versions, Mac OS X,

Linux, VMWare ESXi, Citrix XenServer and other Unix operating systems

- USB or RS232 serial port interface (selectable)
- Expansion slot for interface boards
- Status, measurements, alarms and input, output and battery parameters available on LCD display.

### Features


- EnergyShare socket
- Ability to switch on the UPS in the absence of mains power (Cold Start)
- User-replaceable battery set (Battery Swap)

- USB and RS232 interface
- Slot for communications boards
- Maximum reliability and protection of PCs thanks to PowerShield<sup>3</sup> monitoring and shutdown software, which can be downloaded free at [www.riello-ups.com](http://www.riello-ups.com)
- Highly reliable batteries (automatic and manually-activated battery test)
- Built-in short circuit protection
- Auto restart (when mains power is restored, after discharge of the batteries)
- Emergency power off contact (EPO).

### 2-YEAR WARRANTY

## DETAILS

VSR 800/1100

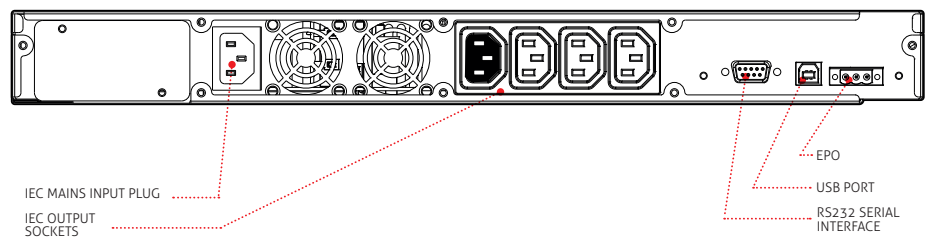

## OPTIONS

### SOFTWARE

PowerShield<sup>3</sup>  
PowerNetGuard

### ACCESSORIES

NETMAN 204  
MULTICOM 302  
MULTICOM 352  
MULTICOM 372  
MULTICOM 382

MULTICOM 401

MULTI I/O  
Interface kit AS400  
MULTIPANEL  
RTG 100

### PRODUCT ACCESSORIES

Universal rails for installation in rack cabinets

MODELS	VSR 800	VSR 1100
<b>POWER</b>	<b>800 VA/640 W</b>	<b>1100 VA/880 W</b>
<b>INPUT</b>		
Nominal voltage	230 Vac (220, 240 V selectable)	
Voltage tolerance	162 V - 290 V	
Frequency	50/60 Hz with automatic selection	
Frequency tolerance	±5% (3% to 10% configurable)	
<b>OUTPUT</b>		
Nominal voltage	230 Vac (220, 240 V selectable)	
Frequency	50 or 60 Hz with automatic selection	
Waveform	Sinusoidal	
<b>BATTERIES</b>		
Type	VRLA AGM maintenance-free lead based	
Recharge time	4-6 h	
<b>OTHER FEATURES</b>		
Net weight (kg)	12	13
Gross weight (kg)	14.5	15.5
Dimensions (WxDxH) (mm)	19" x 420 x 1U	
Packaged dimensions (WxDxH) (mm)	595 x 540 x 140	
Protections	Overload - short-circuit - overvoltage - undervoltage - temperature - excessive low battery	
Communications	USB / RS232 / slot for communications interface	
Input plugs	1 IEC 320 C14	
Output sockets	4 IEC 320 C13	
Standards	EN 62040-1-1 and Directive 2006/95/EC; EN 62040-2 and Directive 2004/108 EC	
Operating temperature	0 °C / +40 °C	
Storage temperature	-15 °C / 45 °C	
Colour	Black	
Relative humidity	<95% non-condensing	
Noise	< 50 dBA	



Cetronic Power Solutions Ltd

Sales: 01920 871077 – Email: [sales@cetronicpower.com](mailto:sales@cetronicpower.com) – Website: [www.cetronicpower.com](http://www.cetronicpower.com)